

Analogue Power Meters Active - Reactive (WQ)

WQ 96
WQ 144

Data Sheet

Analogue Power Meters
90°Scale



Application

The Watt meters, WQ96/144 are offered for the AC systems
 -single phase
 -3 phase balanced load 3 or 4 wire
 -3 phase unbalanced load 3 or 4 wire

These instruments are suitable to indicate forward (export / out going) and reverse (import / in coming) power flow. They can be used both on sinusoidal and non - sinusoidal current

These meters offer several advantages in Switchboard and Generating Set panels. Number of meters can be mounted in a single Cut out (Mosaic Mounting). The Bezel, Front window glass and Dial can be easily replaced


Features

- Linear scale.
- Knife edge pointer.
- Glass filled polycarbonate housing
- Easily replaceable glass and bezel.
- Easy installation with swivel screws.

Functional Principle

For active and reactive power measurement, a moving-coil indicator is used to indicate watts and vars for which an analogue DC signal is obtained from a power converter attached to the case of the indicator.

Schematic diagram.

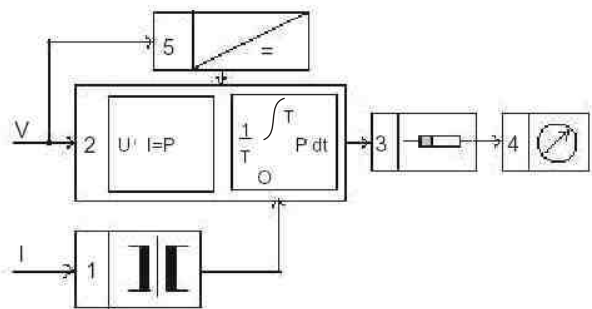

The power converter uses one, two or three for multiplier systems (2) depending on the measurement of balanced or unbalanced load AC systems. Current transformers (1) provide the input current to the multiplier circuit.

The multipliers form the product of the instantaneous values of current and voltage (TDM principle). The product resultant is integrated, thereby suppressing the AC ripple. Subsequently product proportional output is delivered to (3). There the voltage is converted into Current, whose magnitude also depends on Feasibility Factor (λ).

Finally this current is fed to the moving coil movement, (4).

For the instrument DC power supply is obtained from input voltage, (5).

Specifications

Scale and Pointer

| | |
|-----------------------|---------------|
| Pointer | Knife pointer |
| Pointer deflection | 0 ... 90° |
| Scale characteristics | Linear |
| Scale di vision | Coarse-fine |
| Scale length | WQ96 WQ144 |
| | 97mm 146mm |

Mechanical Data

| | |
|------------------|---|
| Case details | Moulded square case suitable for mounting in Control / Switchgear panels, Machinery consoles. |
| Case material | Glass filled polycarbonate, flame retardant and drip proof as per UL 94 V-0. |
| Front facia | Glass |
| Colour of be zel | Black |
| Position of use | Vertical |
| Panel fixing | Swivel screws. |
| Mounting | Stackable in a single cutout |
| Panel thickness | ≤ 25 mm |
| Terminals | Hexagon studs, M4 screws and wire clamps E3 |

Electrical Data

| | |
|--------------------------------|--|
| Measured quantity | Active / Reactive Power |
| Response time | 4s max. |
| Overload capacity (acc to IS : | 1248/ IEC 51/ DIN EN 60051) |
| Continuously | 1.2 times rated voltage / current |
| Short duration | 2 times rated voltage , 5 Sec max 10 times rated current ,5 Sec max |

Power consumption(Approx)

| | |
|--------------------------|-------------------------------|
| Current path | ≤ 0.25 VA |
| Voltage path types | |
| E1W, D1W, D1B, V1W, V1B | ≤ 3.0 VA |
| E1B | ≤ 3.5 VA |
| D2W, D2B | ≤ 3.4 VA |
| V3W | ≤ 3.9 VA |
| V3B | ≤ 4.3 VA |
| Enclosures code | IP 52 case |
| (IEC 529) | IP 00 for terminals |
| insulation class | Group A according to VDE 0110 |
| Rated insulation voltage | 660 V |
| Proof voltage testing | 2 kV |
| Installation catagory | 300 VCAT III |
| (IEC 1010) | |
| insulation resistance | > 50 Mohm at 500 V d.c. |

Accuracy at Reference Conditions

| | |
|----------------|--|
| Accuracy class | 1.5 according to IS:1248 (IEC 51/ DIN EN 60051) |
|----------------|--|

Reference conditions

| | |
|---------------------|---|
| Ambient temperature | 23 °C ± 2 °C |
| Position of use | Nominal position ± 1° |
| Input | Full-scale power value Pw or Pb |
| Feasibility factor | "Lambda"=Pw/Ps or Pb / Ps |
| Power factor | Cos φ = 1 ± 0.01 for Watt meters & Sin φ = 1 ± 0.01 for Var meters |
| Voltage | Rated voltage + 2% |
| Frequency | 45-65 Hz (50 Hz ±0.1% for E1B) |
| Current | 20% to 120% of rated current |
| Others | IS: 1248 (IEC 51/ DIN EN 60051) |

Electrical and mechanical zero point in the meter are not necessarily identical. Zero adjustment should be done when only voltage is applied and current circuit not energised.

Nominal range of use

| | |
|-------------------------|-----------------------|
| Ambient temperature | 0 ... 50 °C |
| Position of use | Nominal position ± 5° |
| External magnetic field | 0.5 mT |

| | |
|--------------|--|
| Voltage | Rated voltage $\pm 15\%$ |
| Power factor | $\cos \phi = 1$ to 0.5 (ind.) for active power $\sin \phi = 1$ to 0.5 (ind.) for reactive power |
| Frequency | 45-65 Hz (50 Hz $\pm 1\%$ for E1B) |

Environmental Conditions

| | |
|-----------------------|---|
| Climatic suitability | Climate category II as per IS : 1248 (climatic class 3 according to VDE / VDI 3540) |
| Operating temperature | -10 ... + 55 °C |
| Storage temperature | -25 ... + 65 °C |
| Relative humidity | < 75% annual average, non-condensing |
| Shock resistance | 15g, 11ms |
| Vibration resistance | 10-55-10 Hz/0.15 mm 1.5 g at about 50 Hz. |

Standard Measuring Ranges

| Type | Active power | Reactive power |
|---------------------------------------|--------------|----------------|
| Single phase system | E1W | E1B |
| 3 phase 3 wire system balanced load | D1W | D1B |
| 3 phase 4 wire system balanced load | V1W | V1B |
| 3 phase 3 wire system unbalanced load | D2W | D2B |
| 3 phase 4 wire system unbalanced load | V3W | V3B |

selection of measuring range

Apparant power P_s is calculated from primary ratings of current transformer and voltage transformer.

In single phase network, $P_s = V \cdot I$
where V = voltage between phase and neutral & I = line current.
In three phase network, $P_s = \sqrt{3} V \cdot I$
where V = voltage between two phase & I = line current.

Full scale value i.e range of the instrument (P_w = active power, P_b = reactive power) must be selected in such a way that the same remain between 0.5 times and 1.2 times the value of apparant power P_s .

Thus feasibility factor "Lambda" should be between 0.5 and 1.2 where "Lambda" = P_w/P_s or P_b/P_s

Full scale values shall preferably be selected from standard series according to DIN 43701, 1-1.2-1.5-2-2.5-3-4-5-6-7.5-8 and their decadic / decimal multiples.

Rated voltage:-

For Single phase(E1W, E1B) :- 57.7, 63.5, 100, 110, 127, 220, 289, 380,500V.
For Three phase (D1W, D1B, D2W, D2B, V1W, V1B, V3W, V3B) :- 100, 110, 220, 240, 380, 415, 500.

The voltage will be considered as a phase voltage (between phase and neutral) in case of single phase meters and as a line voltage (between two phases) in case of multi phase (2 wire, 3 wire and 4 wire) meters.

Rated current:-

1A OR 5 A
If used on current transformer, please state transformer ratio on the order.

Applicable Standards

| | |
|---|------------------------|
| Nominal case and cutout dimensions for indicating electrical instruments. | : IS 2419 DIN 43700 |
| Scale and pointer for electrical measuring instruments. | : IS 1248 DIN 43802 |
| Connections and Terminal markings for panel meters. | : IS 1248 DIN 43807 |
| Terminal bolts / leads | : DIN 46200/46282 |
| Clamp straps for connections. | : DIN 46282 |

| | |
|---|---|
| Safety requirements and protective measures for Electrical indicating instruments and their accessories. | : IS 9249 DIN 40050 / 8-70 VDE 0110 /11-72 VDE 0410 /10-76 IEC 529,IEC 1010 |
| Performance specifications for direct acting indicating analogue electrical measuring instruments and their accessories | : IS 1248 IEC 51/DIN EN 60051 DIN 43701 |
| Front frames for indicating measuring instruments principle dimensions. | : DIN 43718 |
| Technical conditions of delivery for electrical instruments. | : DIN 43701 |
| UL Combustibility class. | : UL 94 V-O |
| Mechanical strength (Free fall test, vibration test) | : IS 1248, IEC 51 IS 9000 VDE 0411, part I, Sec.43/44.IEC 1010 |
| Environmental conditions | : IS: 1248 IS: 9000, Part 5,7,8 VDE / VDI 3540 |

Electro Magnetic Compatibility(EMC)Compliance as per following standards:-
EN 50081-2,EN 50082-2,EN 55011/CISPR 11,
EN 60555-2,IEC 555-2,
EN 61000-4-4 / IEC 1000-4-4,
EN 61000-4-2 / IEC 1000-4-2,
EN 61000-4-5 / IEC 1000-4-5, ENV 50140.

Comply with following European directives: 89/336/EEC(EMC directive),73/23/EEC(low voltage directive)&amendment 93/68/EEC, for CE marking.


Options


| | |
|-----------------------|-------------------------------------|
| Case | |
| Front facia | Antiglare glass |
| Colour of bezel | Red, Yellow, Blue, White |
| Red index pointer | Front adjustable on site |
| Position of use | on request 0°...180° |
| Dial | |
| Blank dial | With initial and end values marked. |
| Special markings | Numbering /Lettering. |
| Division dials | Basic divisions without numbering. |
| Colour markings/bands | Red or green. |

Safety Precautions

- Instruments with damaged bezels or window glasses must be disconnected from mains.
- Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing, if non - insulated connector wires are used.
- Scales should be replaced under Voltage- free conditions.
- Bezels and window glasses should be replaced under Voltage - free conditions

Connections

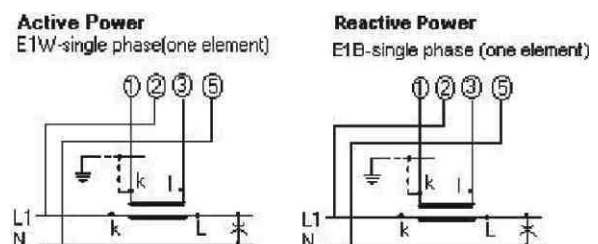

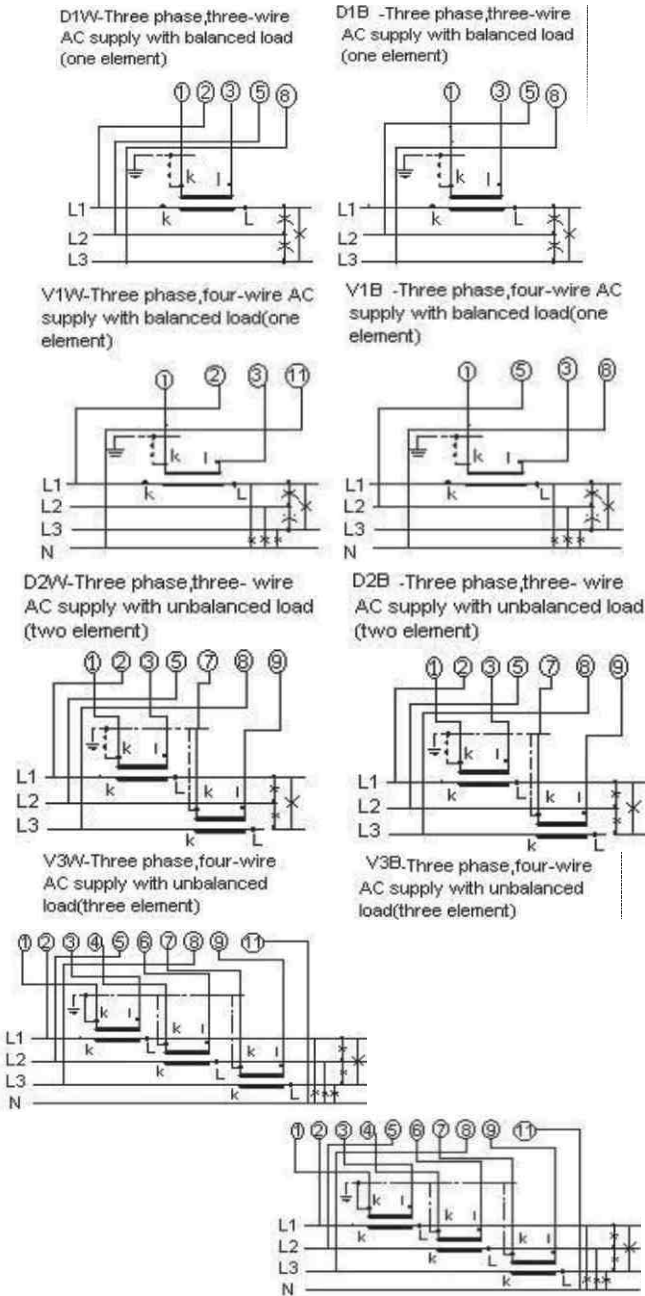

| Dimensions (in mm) | | WQ 96 | WQ 144 |
|-----------------------|-----------------|--------------------|------------------|
| Bezel | a | 96 | 144 |
| Case | b | 90 | 136 |
| Depth | c ^x | 106 | 106 |
| | d | 91.5 | 137.5 |
| Cutout Size | e | 5.5 | 5.5 |
| | | 92 ^{10.8} | 138 ¹ |
| Depth with Back cover | f ^{xx} | 64 | 64 |
| Weight (approx.) | | 0.65-0.9 kg. | 0.9-1.1 kg. |

Ordering Information

| | | | | |
|------------------|---|-----|-----|--------------------------------|
| Type | WQ | | | Watt and Var meter,90° Scale |
| Front dimension | 96 and 144 | | | 96 mm x 96 mm 144mm x 144mm |
| Type | E1W | E1B | D1W | D1B |
| | V1W | V1B | D2W | D2B |
| | V3W | V3B | | |
| | Single phase systems | | | |
| | 3 phase 3 wire system balanced load | | | |
| | 3 phase 4 wire system balanced load | | | |
| | 3 phase 3 wire system unbalanced load | | | |
| | 3 phase 4 wire system unbalanced load | | | |
| Measuring ranges | Specify while ordering | | | |
| Rated voltages | Refer to table inside | | | |
| Rated currents | 1A, 5A | | | |
| Front facia | Normal glass ¹ Antiglare glass ³ | | | |
| Colour of bezel | Black ¹ Red,Blue,Yellow,White ³ | | | |
| Position of use | Vertical ¹ On request 0 180 ^{0 3} | | | |
| Dial | Standard scale same as measuring range ¹ Blank dial with division ³ Additional lettering on request ³ Additional numbering on request ³ Coloured marking red or green ³ Coloured sector red or green ³ | | | |
| Logo | RISHABH ¹ , for Indian sales C.G. ¹ , export through Crompton Greaves I.D. Others ³ | | | |

¹ standard


³ Please clearly add the desired specifications while ordering

Ordering Example

WQ 96 V3W for active power 3 phase 4 wire system unbalanced load,measuring range 0 ... 480 kW, voltage AC 440 V, for use on current transformer 600/5A.

Specifications are subject to change without notice(11/11)

Dimensions

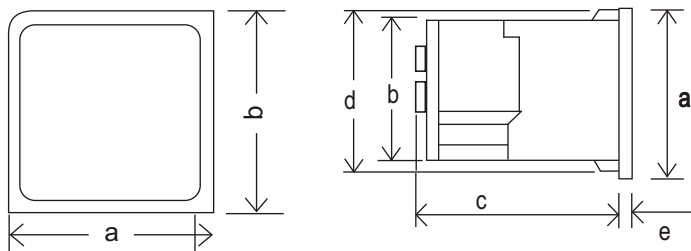

RISHABH
INSTRUMENTS
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.
F-31, MIDC, Satpur, Nashik-422 007,India.
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064
E-mail : India :- marketing@rishabh.co.in
International :- exp.marketing@rishabh.co.in
www.rishabh.co.in