

PREMIUS

Single Phase UPS
7.5 – 20 kVA

THE POWER
OF ONE



**NEW ENERGY
TO POWER**



The one for **YOUR NEEDS**

Legrand presents Premium, a true online double conversion single-phase UPS that brings the Power of One advantage. Crafted meticulously to bring together cutting-edge technology, aesthetics, user-friendly operation, and exceptional performance. Premium offers best-in-class features that ensures consistent high-quality power supply for mission-critical applications across several industries, thereby redefining the industry's standard for single-phase UPS systems.


Get the Power of
ONE
advantage



Power of One in **DESIGN**

Thoughtful Design


Premius is thoughtfully engineered to seamlessly adapt to any environment. It is designed to be dynamic as it gives you the flexibility to interchange between single-phase or three-phase input and single-phase output, depending on your business needs.



**Adaptive
Configuration**



Designed with Purpose

The microprocessor-controlled fans effectively manage fan speed by automatically shutting down when not needed. This feature enables the UPS to operate at peak performance levels while minimising noise.



**Microprocessor
Controlled Fans**



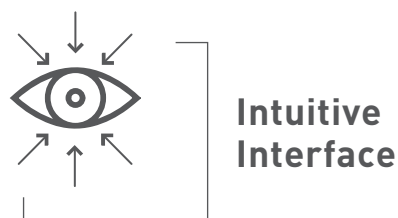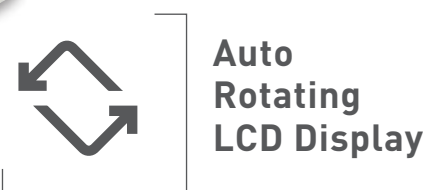

Easy User Interface

Premius comes with user-friendly gravity sensing LCD display that can adapt as per UPS Rack / Tower installation. This LCD display not only allows the user to view the operating status of the UPS in detail, but also offers a comprehensive presentation of all parameters. An innovative auto-rotating display ensures effortless monitoring and management, adapting to your preferred orientation for clear and convenient real-time status updates.

Compact Footprint

Premius is a compact high-density UPS, with 30% less footprint resulting in significant space saving. When mounted in rack form factor, Premius occupies just 3U of rack space allowing ease of handling with minimum effort, during expansion or relocation of the business.



**30% Less
Footprint**

Power of One in **PERFORMANCE**

**UPTO
11%**

**More Active
Power**


Unity Power Factor

The complete Premium range offers a unity power factor that provides maximum active power, by converting more of input power to usable output power. This optimises energy usage. Its unity power factor eliminates the need for oversizing, ensuring it can efficiently manage dynamic load conditions without issues making it ideal for segments like Data Centers, IT& ITeS.



Low Total Cost of Ownership


Owing to its three-level inverter design, Premium delivers upto 96% efficiency, leading to a significant reduction in energy loss and increased energy cost savings. The complete range of Premium offers less than 5% THDi which helps reduce energy consumption, saves operational costs and increases the life span of the UPS. The combination of these features, along with its compact footprint, ensure low Total Cost of Ownership and makes it an ideal choice for diverse industries.



**Energy Cost
Saving**

Power of One in REMOTE MANAGEMENT

Tailored for the modern interconnected world, Premium offers a range of communication options. Its built-in communication software enables UPS monitoring via RS485. With the SNMP card, the UPS can be controlled remotely over the internet and it also has a feature to send SMS alerts for programmed events.

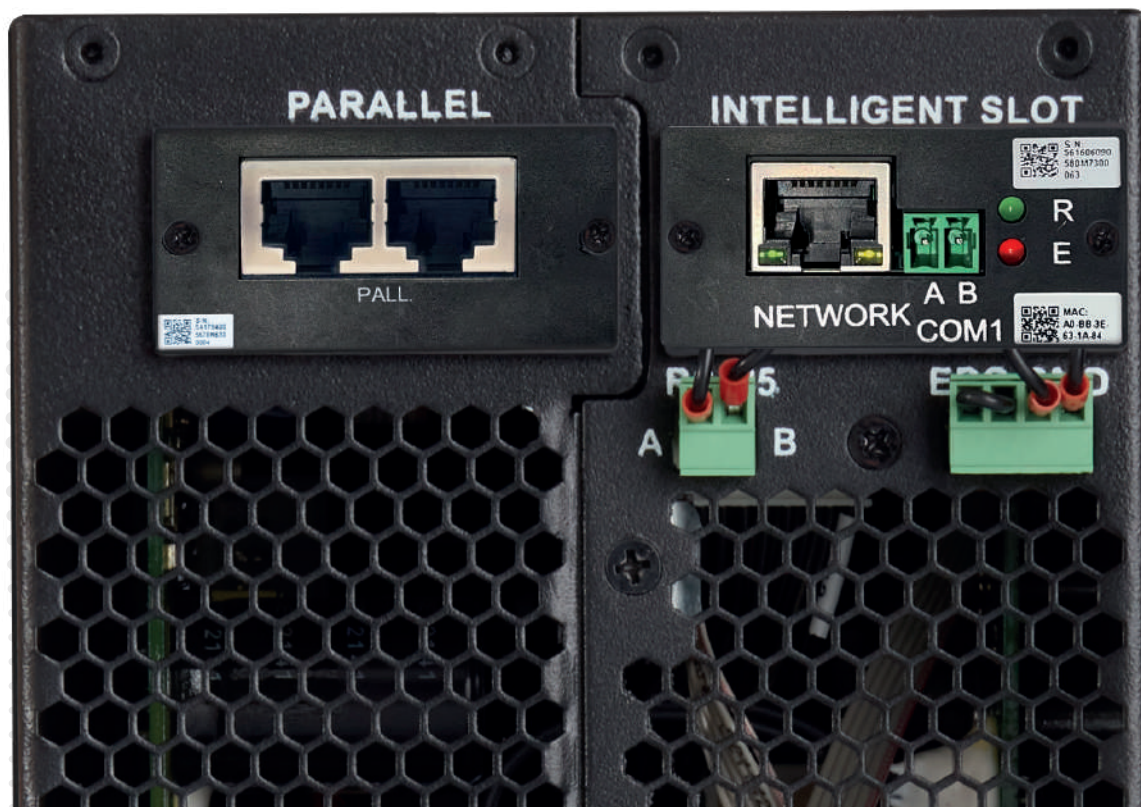


Power of One in **FLEXIBILITY**


Redundancy Configuration

Premius offers N+X redundancy. This makes it possible to rack up to four UPS units in parallel and increase the output up to 80 kVA. In the event of failure of a particular UPS, the other UPS units take over the complete load, ensuring maximum uptime and uninterrupted business continuity.


Available in 7.5 to 20 kVA

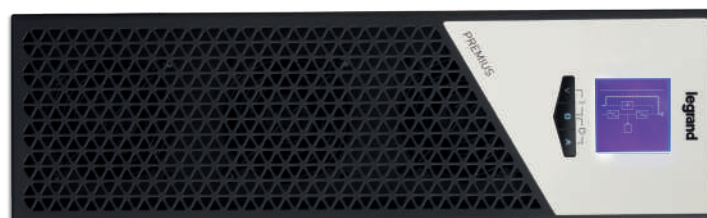


+


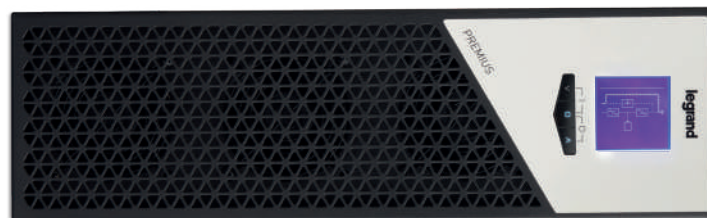


+

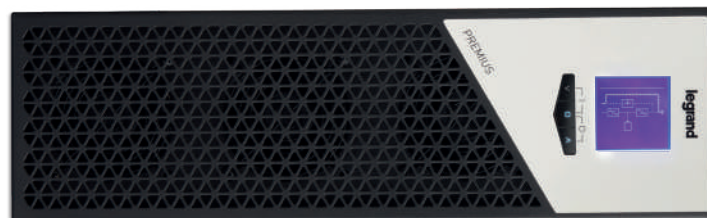

+

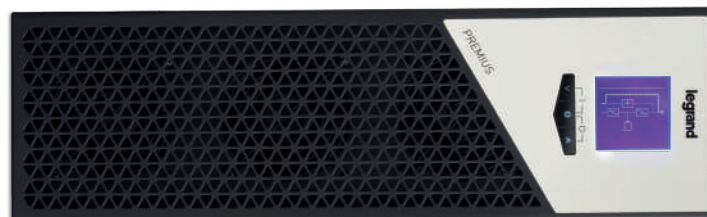

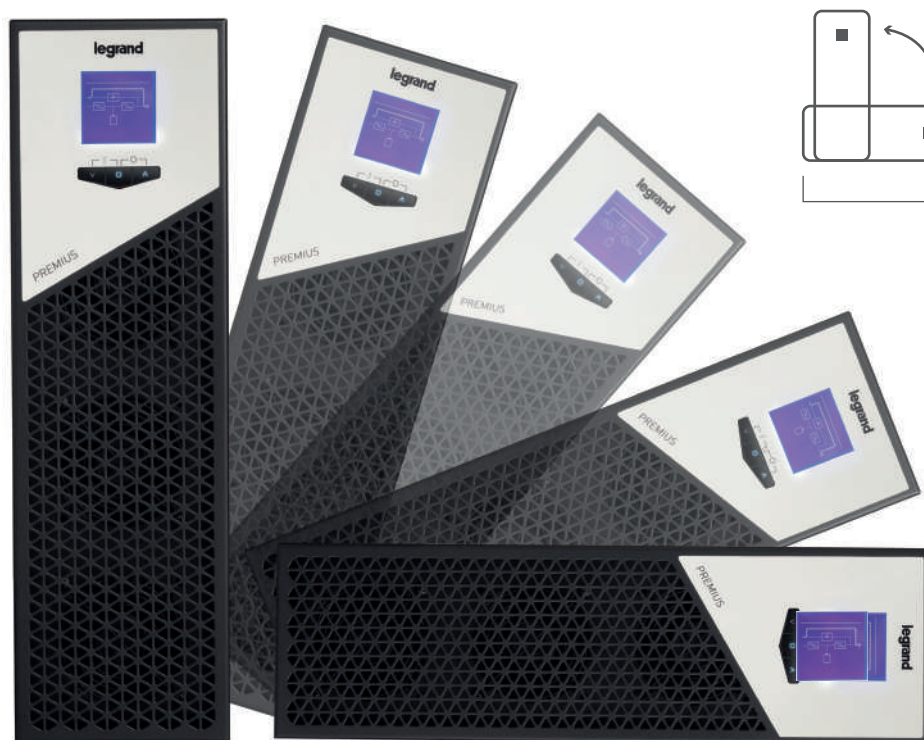


Flexible Configuration

Rack Tower Configuration

Premius provides flexibility to be configured as a rack or tower UPS, depending on your infrastructure needs. Its high-density rack tower form gives you the option to set it up as a rack or as a conventional UPS making it ideal for IT rack set ups. This adaptability simplifies installation and maintenance in data centers and server rooms.

High Capacity Charger

Premius is equipped with a high capacity internal charger that restores the charge during a power outage. This gives it a longer backup and allows the recharge to be twice as fast.




2x Quick Charge

Power of One in **RELIABILITY**

Conformal Coating

Premius is engineered to endure diverse operational conditions. The application of conformal coating acts as a safeguard against corrosion and electrical malfunctions on the printed circuit boards, ensuring optimal performance and extending the UPS' lifespan.

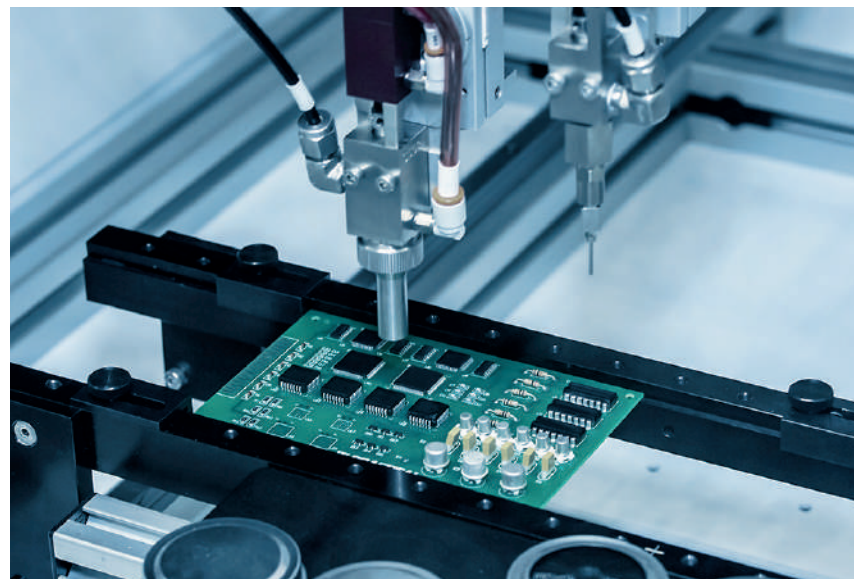

Bypass Panel

Premius comes with an optional bypass panel that provides a mechanism to safely transfer power loads between the UPS and the utility source. In case of UPS maintenance or failure, the bypass panel allows for seamless switching to utility power, ensuring continuous power supply to critical equipment without disruption. This redundancy minimizes downtime and enhances reliability of the UPS ensuring uninterrupted business continuity.

Dust Filter

Premius is equipped with a dust filter that adds to the system's reliability by preventing the accumulation of dust and particulate matter, ensuring optimal performance and longevity even under harsh environments.



Dust Protection



Over Voltage Protection

Premius incorporates built-in protection to safeguard its components from potential harm caused by high voltage spikes and transient surges. This not only ensures the longevity and reliability of the UPS, but also enhances the protection of critical equipment, reducing the risk of costly downtime and data loss.

PREMIUS 7.5 - 20 kVA

Single Phase Online Double Conversion UPS

General Characteristics	7.5 kVA	10 kVA	15 kVA	20 kVA
Nominal power (VA)	7500	10000	15000	20000
Active power (W)	7500	10000	15000	20000
Technology	Online, double conversion, VFI-SS-111			
Waveform	Sinusoidal			
Architecture	Rack / Tower			
Configuration	3P-1P / 1P-1P (Factory configurable)			
Input Characteristics				
Input voltage	230 V (Line-Neutral) 400 V (Line-Line)			
Input voltage range	176 V-280 V (Line-Neutral), 305 V-485 V (Line-Line)			
Input frequency range	40-70 Hz			
THD of input current	< 5% at full linear load and normal voltage			
Input power factor	≥ 0.99 (with full linear load)			
Connection	Terminal block			
Output Characteristics				
Outlets	Terminal block			
Output voltage	230 V (adjustable to 220/230/240±1%)			
Output frequency	50 / 60 Hz ± 0,1%			
Crest factor	3:1			
THD of output voltage	< 1% at full linear load			
	< 3% at full non-linear load			
Efficiency	Up to 96%			
Overload capacity	105% continuous, 106-110% load 60 mins, 111-130% load 10 mins, 131-155% load 1 min, above 155% load 200ms.			
Batteries and Battery Charger Characteristics				
Number of batteries	12 V battery 192 Vdc ~ 480 Vdc (± 8 nos. ~ ±20 nos.)	12 V battery 288 Vdc ~ 480 Vdc (± 12 nos. ~ ±20 nos.) (Output derates to 75% if the battery voltage 288 Vdc ~ 360 Vdc (±12 nos. ~ ±15 nos.)		
Battery type	Depending on the capacity of external batteries			
Rated battery current	10Amps (1A/2A/3A/4A/5A/6A/7A/8A/9A/10A selectable)			
Recharge time (to 90%)	4 hours			

Communication and Management				
Screen and signalling	Three buttons with LEDs for real-time control of the status and the main parameters of the UPS			
Communications ports	RS485			
Connector for network interface	SNMP/ Dry contact (Optional)			
Remote control	Yes			
Emergency power off (EPO)	Yes			
Mechanical Characteristics				
UPS dimensions WxDxH (mm)	438x572x130 (3U)			
UPS Net weight (kg)	19	19	20	20
Distribution box dimensions WxDxH (mm)	438x572x130 (3U)			
Distribution box Net weight (kg)	11			
Environmental Conditions				
Operating temperature	0 °C to +40 °C			
Protection index	IP 20			
Relative humidity (%)	0% to 95% (non-condensing)			
Storage temperature	-10 °C to +50 °C			
Noise level at 1 m (dBA)	< 55			
Reference Directive and Standards				
Safety	EN / IEC 62040-1 & IS 16242:2014			
EMC	EN / IEC 62040-2			
Performance and test requirements	IEC 62040-3			

Note: Product specifications are subject to change purely on company's discretion without any prior notice.
General tolerance for dimensions and weight is $\pm 2\%$.

Power of One in **SERVICE**

In today's dynamic business environment, proactive and efficient service delivery is key to business continuity. With customer centric focus, we have put technology as an enabler for a seamless experience, quick response time and faster resolution with CRM.

Onsite Training

Numeric's service engineers are aptly qualified to conduct training programmes and sessions which include hands-on operations, safety, erection, decoding the information on the front panel, precautions, necessary monitoring and many more crucial aspects.



Site Test, Commissioning

Our Service Engineers conduct rigorous site tests and setting-up of the UPS system before going live. They also configure the UPS according to your requirements. Commissioning operations

for all UPS systems are carried out by qualified engineers to guarantee seamless startup. The installation report is delivered after the final handing over of the UPS system.

Preventive Maintenance

Electronic equipment and power systems, such as UPS, contain limited-life components and parts that must be replaced according to the manufacturer's specifications. To ensure optimal performance and protect your critical applications from potential downtime, it is crucial to perform preventive maintenance operations on a regular basis and replace

parts when needed. Our Service Contracts with PM include cleaning, UPS measurements, functional tests, technical reports if required, battery health check up and software upgrades. A Preventive Maintenance Plan is one of the most cost-effective actions that can preserve your initial investment and ensure business continuity.



On Demand Service

In the event of an emergency call, engineers and stocks of spare parts are strategically located at locations near you to minimise downtime. This is available 24x7x365. Our proprietary diagnostic software helps our engineers identify the fault for a short Mean

Time To Repair (MTTR). Corrective actions such as part replacement and other fixes are undertaken to return the UPS system back to normal operations.

Head Office

10th Floor, Prestige Center Court,
Office Block, Vijaya Forum Mall, 183,
N.S.K Salai, Vadapalani,
Chennai - 600 026.
Phone: +91 44 4656 5555

Regional Offices

New Delhi

B-225, Okhla Industrial Area,
4th Floor, Phase-1,
New Delhi - 110 020.
Phone: +91 11 2699 0028

Kolkata

Bhakta Tower, Plot No. KB22,
2nd & 3rd Floor, Salt Lake City,
Sector - III, Kolkata - 700 098.
Phone : +91 33 4021 3535 / 3536

Mumbai

C/203, Corporate Avenue, Atul Projects,
Near Mirador Hotel, Chakala,
Andheri Ghatkopar Link Road,
Andheri (East), Mumbai - 400 099.
Phone : +91 22 3385 6201

Chennai

10th Floor, Prestige Center Court,
Office Block, Vijaya Forum Mall,
183, N.S.K Salai, Vadapalani,
Chennai - 600 026.
Phone : +91 44 3024 7236 / 200

Branch Offices

Chandigarh

SCO 4, First Floor, Sector 16,
Panchkula, Chandigarh - 134 109.
Phone : +91 93160 06215

Dehradun

Unit-1 and 2, Chakrata Road,
Vijay Park Dehradun - 248001.
Uttarakhand
Phone : +91 135 661 6111

Jaipur

Plot No. J-6, Scheme-12B,
Sharma Colony, Bais Godown,
Jaipur - 302 019.
Phone : +91 141 221 9082

Lucknow

209/B, 2nd Floor, Cyber Heights,
Vibhuti Khand, Gomti Nagar,
Lucknow - 226 018.
Phone : +91 93352 01364

Bhubaneswar

N-2/72 Ground Floor, IRC Village,
Nayapally, Bhubaneswar - 751 015.
Phone: +91 674 255 0760

Guwahati

House No 02,
Rajgarh Girls High School Road
(Behind Rajgarh Girls High School),
Guwahati - 781 007.
Phone : +91 361 245 0322/96000 87171

Patna

405, Fraser Road, Hemplaza,
4th Floor, Patna - 800 001.
Phone : +91 612 220 0657

Ranchi

202 & 203, 2nd Floor, Sunrise Forum,
Bardwan Compound, Lalpur, 2nd Floor,
Ranchi - 834 001.
Phone : + 91 98300 62078

Ahmedabad

A-101/102, Mondeal Heights,
Beside Hotel Novotel, Near Iscon Circle,
S G Highway, Ahmedabad - 380 015.
Phone : +91 79 6134 0555

Bhopal

Plot No. 2, 221, 2nd Floor, Akansha Complex,
Zone-1, M.P.Nagar, Bhopal- 462 011.
Phone : +91 755 276 4202

Nagpur

Plot.No.174, H.No.4181/C/174, 1st Floor,
Loksewa Housing Society, Near Dr. Umathe
& Mokhare College, Bhamti Road,
Lokseva Nagar, Nagpur - 440 022.
Phone : +91 712 228 6991 / 228 9668

Pune

Pinacle 664 park avenue, 8th floor,
Plot no 102+103, CTS No. 66/4,
Final, 4, Law College Rd, Erandwane,
Pune, Maharashtra - 411 004.
Phone : +91 98225 36680

Bengaluru

No-58, First Floor, Firoze White Manor,
Bowring Hospital Road,
Shivajinagar, Bangalore -560 001.
Phone : +91 80 6822 0000

Coimbatore

No. B-15, Thirumalai Towers, No. 723,
1st Floor, Avinashi Road, Coimbatore - 641 018.
Phone : +91 422 420 4018

Hyderabad

Prestige Phoenix Building,
1st Floor, Survey no. 199,
No. 6-3-1219/J/101 & 102, Uma Nagar,
Opposite to Begumpet Metro Station
Begumpet 500016
Phone: +91 40 4567 1717/2341 4398/2341 4367

Kochi

Door No. 50/1107A9, JB Manjooran Estate,
3rd Floor, Bypass Junction,
Edappally, Kochi - 682 024.
Phone : +91 484 6604 710

Madurai

12/2, DSP Nagar,
Dinamalar Avenue,
Madurai - 625 016.
Phone : +91 452 260 4555

NUMERIC®

A Group brand | 

Sales - enquiry.numeric@numericups.com
Service - support.numeric@numericups.com
Contact us.: 0484-3103266 / 4723266
www.numericups.com