

NUMERIC[®]

A Group brand | **legrand**[®]

Keor MOD

THREE-PHASE
MODULAR UPS


up to 600 kW



**NEW ENERGY
TO POWER**



legrand

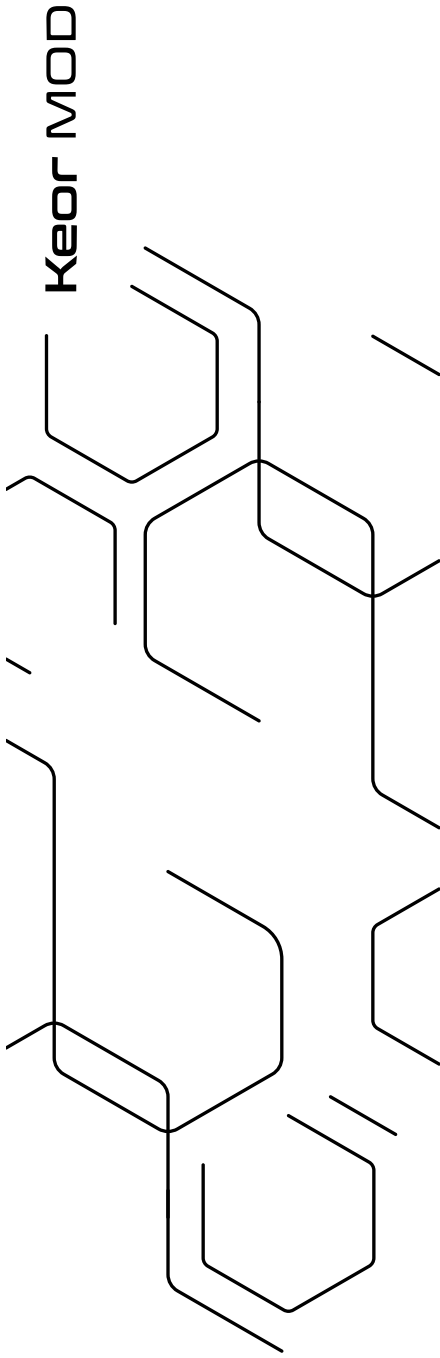

CONTENTS

- 4 MORE THAN A UPS
- 6 TECHNOLOGY AND DESIGN
- 8 IDEAL FOR IT INFRASTRUCTURES
- 10 A COLLABORATION OF TECHNOLOGY
- 12 EXCLUSIVE FEATURES
- 14 INTERNAL BATTERIES UP TO 125 KW
- 16 EXCLUSIVE TOUCH SCREEN DISPLAY
- 18 COMPLETE ON BOARD COMMUNICATION
- 20 CATALOGUE
- 22 CUSTOMER CARE SERVICES



Keor MOD


MORE THAN A UPS


Legrand presents the new **Keor MOD**, the latest addition to the UPS family that redefines the concept of modularity.

Design with unrivalled futuristic style and features.

Outstandingly flexible architecture for all installations and applications.

State-of-the-art technology to achieve the highest levels of efficiency.

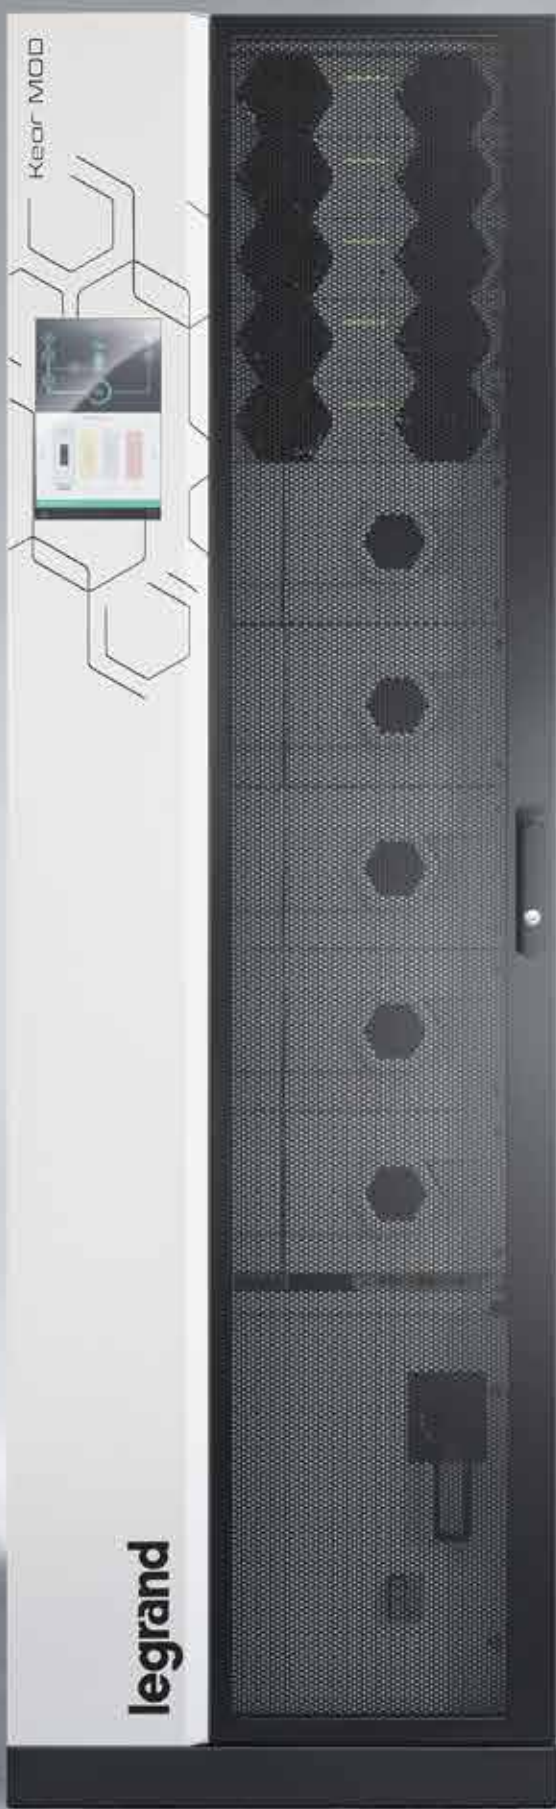

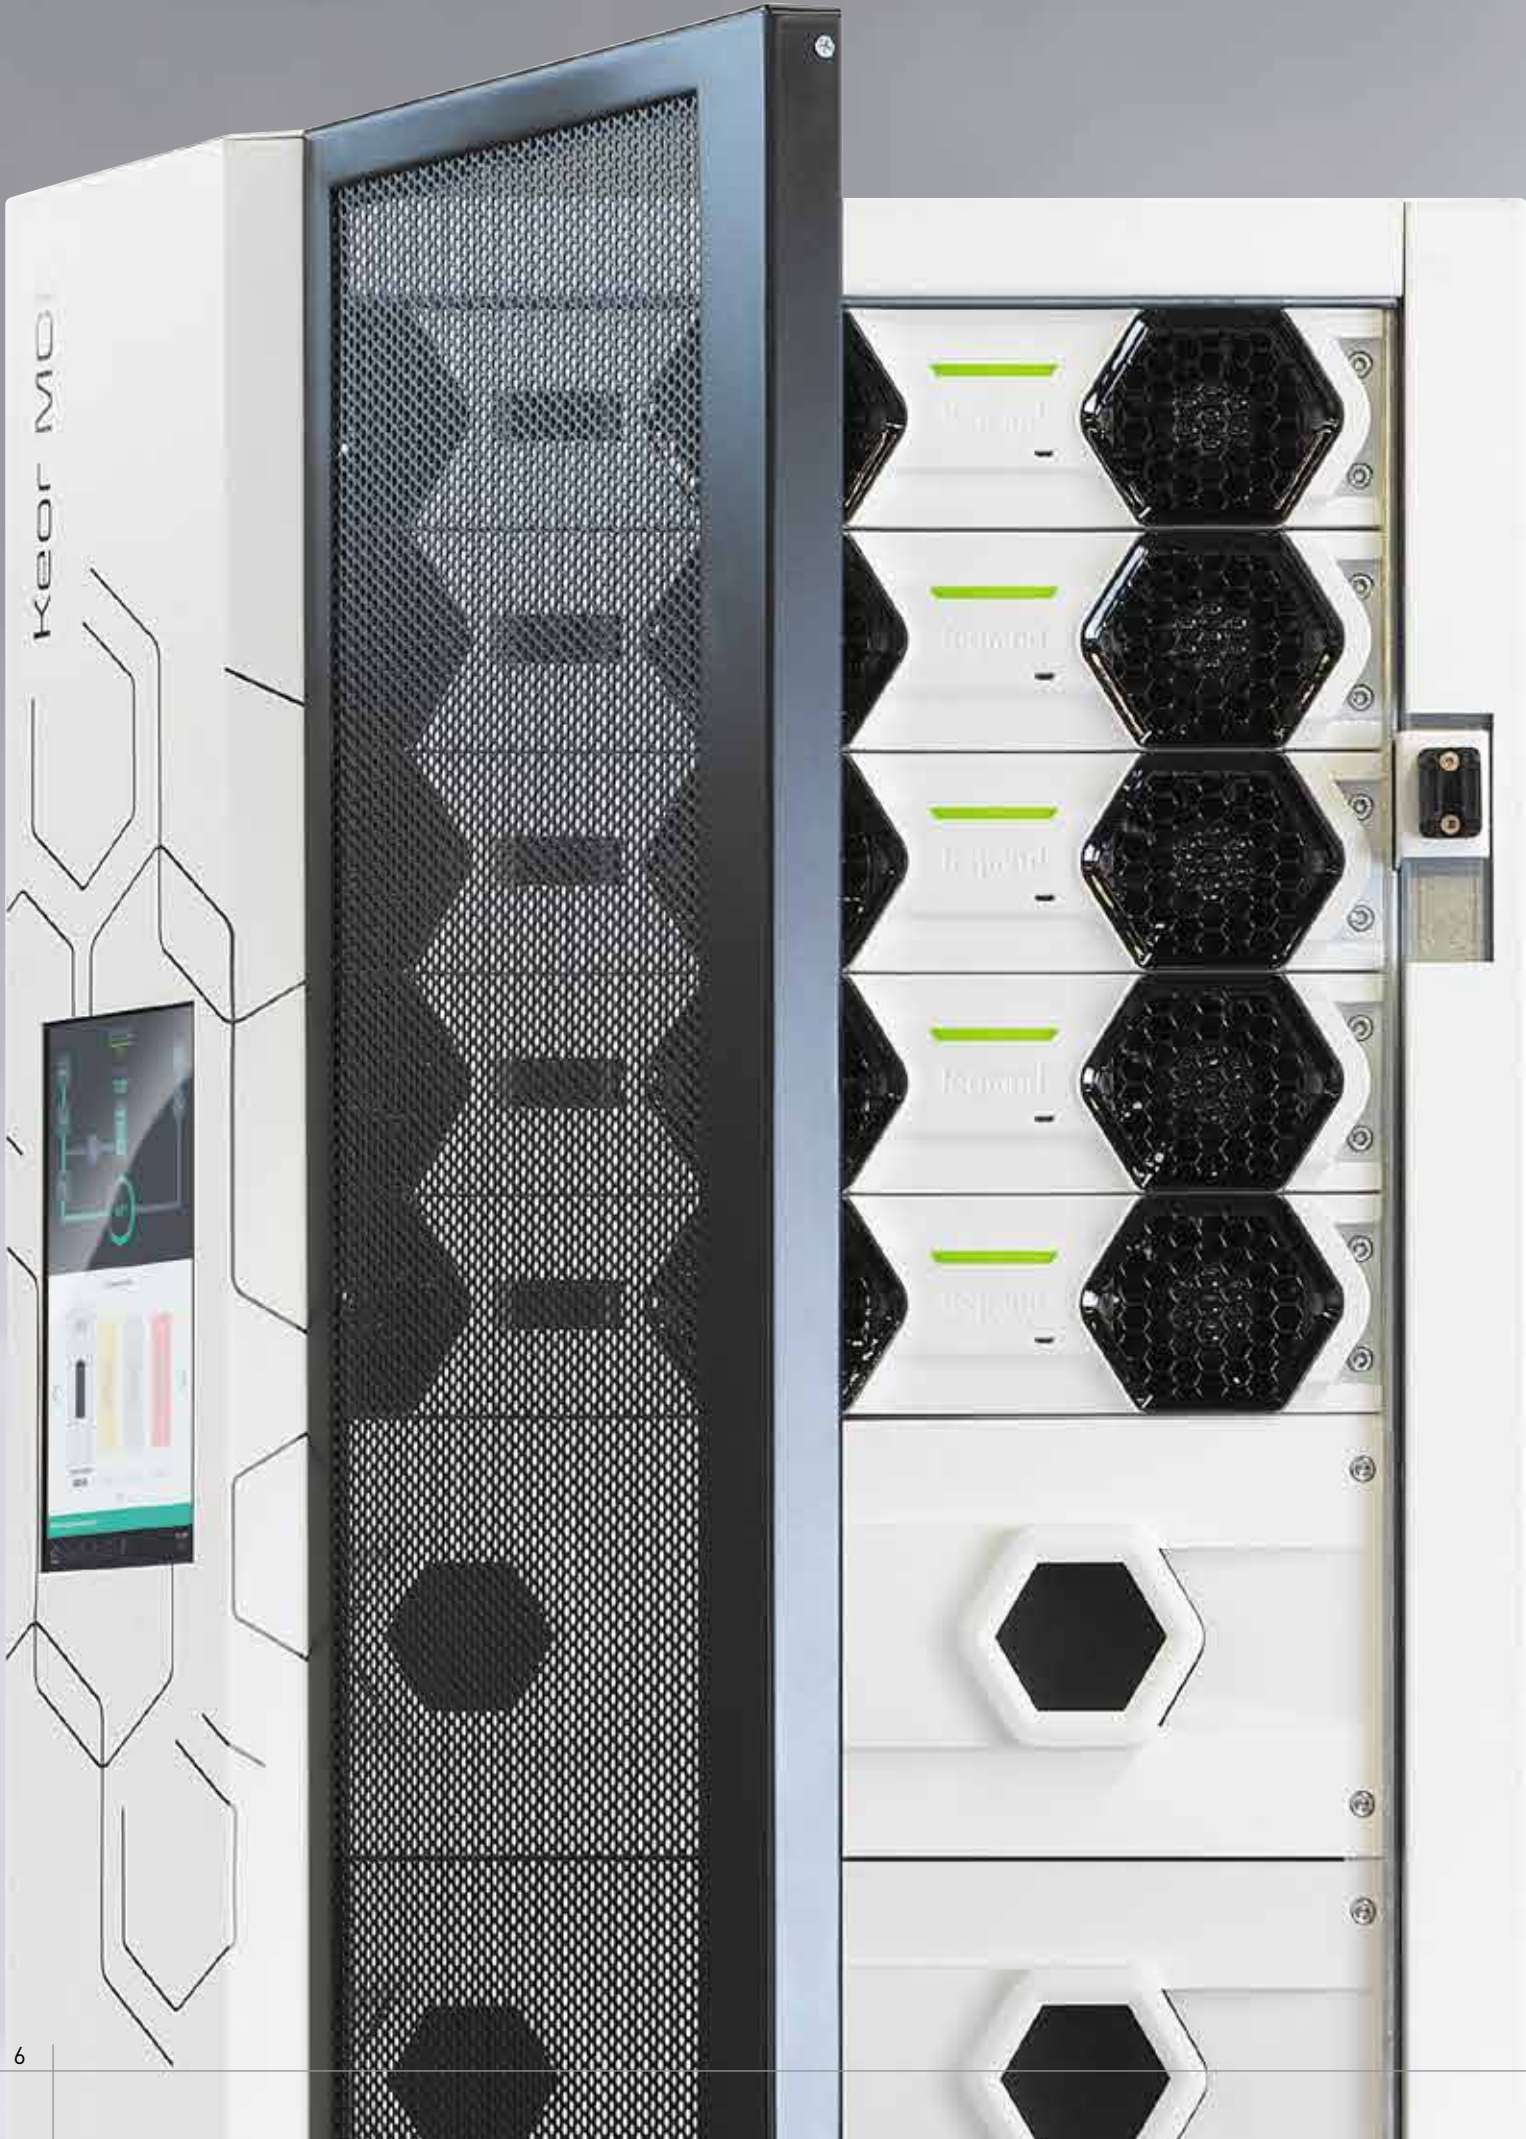

Keor MOD

TECHNOLOGY AND DESIGN

STYLISH

The elegance of the design and the skilful choice of materials have joined forces to create a modern and cutting-edge machine, a UPS with a highly emotional DNA boasting market-leading performance.

REVOLUTIONARY

All the elements comprising the system have been designed to ensure maximum reliability and performance, without forsaking its ease of installation and maintenance. The use of light colours and highly reflective surfaces contribute to reducing environmental lighting in technical rooms (DATA CENTERS), and reduce consumptions in line with a GREEN approach.

POWERFUL

The **Keor MOD** power module is the smallest 25 kW three-phase module available in the market; its high power density (1136 W/dm³) makes it possible to achieve configurations of 125 kW with 5.2 minutes of autonomy (internal batteries) or 600 kW in less than 1m² of space on the ground with the door open.

PERFORMING

- Double conversion efficiency up to 96.8% (from 20% to 50% of the load)
- Efficiency in ECO mode up to 99%.
- Output power factor = 1
- Hot-swappable modules.
- Modular redundancy in N+1 configuration.
- Intelligence distributed between modules.
- UPS Power capacity upto 600 kW.
- Decentralised by-pass.
- Reduced battery charging times.

Keor MOD

IDEAL FOR IT INFRASTRUCTURES

Keor MOD is the ideal solution for all critical computer applications such as DATA CENTERS; its structure allows us to respond to customer demands in terms of continuous evolution of the IT infrastructure.

The range includes just two cabinet configurations:

- up to 5 power modules with internal batteries (25 - 125 kW)
- up to 24 power modules (25 - 600 kW).





PARALLEL SYSTEM Up to 600 kW

Each unit can be connected in parallel to identical or different units until the desired power and/or redundancy levels are reached.

For instance, it is possible to connect up to 4 x 125 kW units with internal batteries in parallel, obtaining a total system power of 500 kW (N+1 redundancy equal to 475 kW in any failure situation).

Moreover, with **Keor MOD** it is possible to connect in parallel up to 24 power modules, also connecting cabinets with different numbers of modules.



Keor MOD

A COLLABORATION OF



TECHNOLOGY



25 kW power module in just 2 units

Extensive research and use of latest generation components is behind the development of this three-phase power module with top performance levels in its category, minimising footprints and weights.

With a capacity of 25 kW and a footprint of just 2 rack units, the **Keor MOD** power module ensures maximum performance in exceptionally small spaces.

The **Keor MOD** power module is equipped with “System On Chip” type control technology which, unlike the conventional version (DSP based), contains a dual Core ARM A9 processor, a high performance FPGA and a set of advanced devices within one single component. This technological choice provides an impressive range of advantages in terms of processing power, speed and versatility.

The power module houses the following components: input PFC, three-level inverter, integrated and independent control logic, battery charger, static and electromechanical by-pass.


Structured Energy Flow

Unique in its kind, **Keor MOD** introduces the new *Structured Energy Flow* system, effectively eliminating all the connection cables inside the power module.

The connections between the various power sections are achieved by the structure that physically connects them. This results in an exceptionally high level of reliability.


Keor MOD

EXCLUSIVE FEATURES

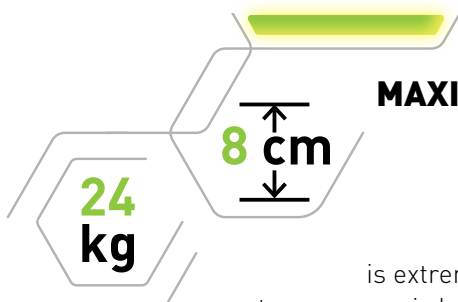

MAXIMUM MANOEUVRABILITY

The power module, is extremely compact and integrates two ergonomic handles to facilitate extraction and insertion of the module. Its light weight means it can also be handled by a single person.

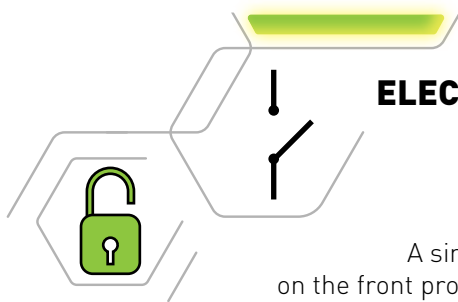

ELECTRICAL AND MECHANICAL SAFETY

A simple and practical "SWITCH" on the front provides the connection and the disconnection both mechanical and electrical, which prevents any incorrect or involuntary removals.



INSTANT COMMUNICATION

Distinctive element of all the Legrand UPS, **Keor MOD** also integrates a LED Status Bar (Multicoloured status bar) with traffic light type coding for the immediate display of the actual operating status.

«HOT SWAP» DESIGN

Thanks to the hot swap functions, plug and play and the total independence of each power module, all maintenance phases and any power expansion are extremely swift and simple.

CONTROLLED NOISE LEVEL

The control of the cooling fans is performed independently based on the load and the temperature of the single power stage, hence decreasing energy consumptions and the noise level of the system.

Keor MOD



INTERNAL BATTERIES UP TO 125 KW

Safe extraction

The battery drawers can be easily extracted using the handle on the front.

The mechanical anti-extraction stop prevents complete extraction of the drawer, preventing accidental falling and allowing operators to work in complete safety.



Light and dividable

The batteries inside the drawer are divided into 4 blocks, each with 6 batteries; this reduces weight (<16 kg each) and avoids direct contacts with dangerous voltages during maintenance phases.

Ease of handling

Each 6-battery block can easily be removed using the integrated handle.

The replacement of individual sections requires very little time and guarantees swift maintenance operations.

Keor MOD

EXCLUSIVE TOUCH SCREEN DISPLAY

Rotating, unique functionality


The 10" touch screen display provides a simplified control panel packed with information, alerts and settings and is also equipped with interactive icons to make navigation and selection of the functions to be controlled quick and simple.

The possibility of being able to rotate the Display inwards by 180° simplifies and speeds up the configuration and maintenance phases.



10 inches with innovative graphics

The display is positioned vertically so you have both the operating block diagram and the UPS layout with all the available information on the same screen.

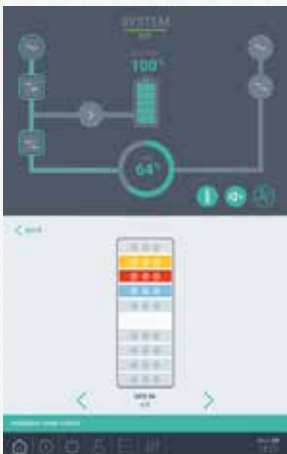




Intuitive and user friendly


All the display icons, including the operating panel, are interactive so as to facilitate navigation and the setting of customisable functions.




Keor MOD

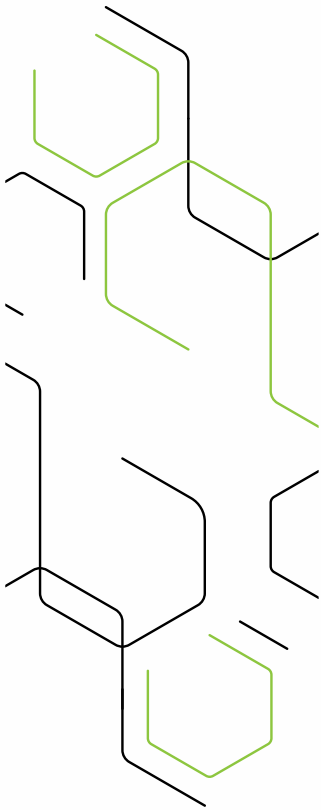

COMPLETE ON BOARD COMMUNICATION



FRONT COMMUNICATION MODULE

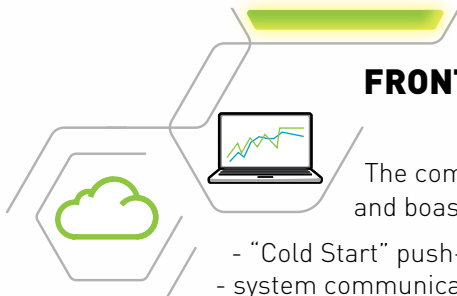

The communication module is positioned on the front, is easily accessible and boasts a wide selection of communication interfaces.

- "Cold Start" push-button
- system communication ports
- RS485 port
- RS485 port for external accessories
- logical gate
- communication interface slot
- USB host port
- 11 floating contact inputs
- 8 floating contact outputs



Eliot is the Legrand program dedicated to connected objects (Internet of things) which identifies all those products or systems which, because they can connect to the internet, give added value in terms of functionality, information, interactions with the environment and use.

Keor MOD

UPS Modular three-phase double conversion VFI



3 104 80

Model UPS - empty power cabinets

Model	Power (kW)	Installable battery drawers	Distribution
3 104 80	25 - 125	from 2 to 10 battery drawers	3-3
3 104 81	25 - 250	-	3-3

Accessories

Description

3 106 75	25 kW power module
3 106 76	Empty battery blocks kit for 6 batteries (to be used in sets of 4 per drawer)
3 106 77	Kit of 2 Empty battery drawers
3 106 78	Kit of 4 battery blocks (6 x 9 Ah batteries)
3 106 79	Kit of 4 battery blocks (6 x 11 Ah batteries)

Keor MOD

UPS Modular three-phase double conversion VFI

Configuration examples

UPS up to 125A

25

Power: 25 kW
Back-up time: 48 min. when 100% charged
1 Power module
10 Battery drawers



UPS up to 250A

50

Power: 50 kW
2 Power modules



75

Power: 75 kW
Autonomy: 11 min. when 100% charged
3 Power modules
10 Battery drawers



100

Power: 100 kW
4 Power modules



125

Power: 125 kW
Autonomy: 5.2 min. when 100% charged
5 Power modules
10 Battery drawers



250

Power: 250 kW
10 Power modules



NOTE: the stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Keor MOD

UPS Modular three-phase double conversion VFI

Characteristics										
General specifications										
Nominal power (kVA)	25	50	75	100	125	150	175	200	225	250
Active power (kW)	25	50	75	100	125	150	175	200	225	250
Module power (kW)	25									
Classification	On-Line double conversion VFI-SS-111									
No. Power modules	1	2	3	4	5	6	7	8	9	10
System	Modular, expandable and redundant UPS system									
Input specifications										
Input voltage	400V 3F+N+PE									
Input frequency	45-65 Hz (43.0 ÷ 68.4 Hz)									
Input voltage range	400V +15%/-20% - 230V +15%/-20%									
THD input current	< 3% (at full load)									
Compatibility with power supply units	Yes									
Input power factor	> 0.99									
Output Specifications										
Output voltage	380, 400, 415V									
Efficiency (power module)	Up to 96.8%									
System efficiency	Up to 96.5%									
Efficiency in Eco mode	99%									
Nominal output frequency	50/60 Hz selectable by the user ±2 % (standard), ±14 % (extended)									
Crest factor	3:1									
Waveform	Sinusoidal									
Output voltage tolerance	±1%									
THD output voltage	<0.5% with linear load, <1% with non-linear load									
Overload capacity	10 minutes at 125%, 60 seconds at 150%									
Bypass	Automatic bypass (static and electromechanical) and manual maintenance bypass									
Batteries										
Battery module	Plug & play									
Battery series type/voltage	VRLA - AGM 12 V, 9 Ah - 11 Ah									
Autonomy	Configurable									
Battery charger	Smart charge technology. 3-stage advanced cycle									
Independent battery configuration	Yes, maximum 5 sets of independent batteries (configurable as common or separate units)									
Communication and management										
Display	10-inch rotating colour touch screen									
Communication ports	2 x RS485 ports (one for external accessories), 11 input floating contacts, 8 output floating contacts, 1 interface slot, USB host port									
Back feed protection	NC/NO auxiliary contact									
Emergency Power Off (EPO)	Yes									
Cold start push-button	Yes									
Remote management	Available									
Mechanical characteristics										
Height (mm)	1990									
Width (mm)	600									
Depth (mm)	970									
Installable power modules	Up to 5					Up to 10				
Installable battery drawers	Up to 10					—				
Ambient Conditions										
Operating temperature/humidity	0 - 40°C / 0 - 95% non condensing									
Protection rating	IP20									
Maximum audible noise at 1 m from the unit (dBA)	50-65									
Conformity										
Certifications	EN 62040-1, EN 62040-2, EN 62040-3									
Services:										
Installation	Modular architecture with "plug & play" power modules and batteries									
Maintenance	Availability of optional services provided by the manufacturer									
Ease of management	Advanced diagnostic functions via the touch screen display									



Customer services

Reliable

Directly present in 250+ locations across India to ensure quick support, a team of 900 factory qualified engineers are available 24/7/365 to support your UPS system to ensure availability to the most critical loads.

Excellent

Numeric competitive edge lies in its ability to provide high value-added UPS systems and service for customers. For Numeric, creating value means providing solutions with low energy consumption. The Legrand Group also provides all products required for electrical and digital building installations, particularly as an integrated system, with solution to fit customer needs.

Tailor-made

We offer a complete range of specific solutions and services to meet customer requirements:

- Technical pre-sales support
- UPS sizing and solution
- Supervision of installation, testing and commissioning.
- Operator training
- Site audits
- Warranty extension offers
- Annual maintenance contract

SERVICES

Today a business is in always ON mode with zero-tolerance for downtime. Numeric offers a wide range of products that promise seamless quality power solutions for all kinds of consumers – industrial, commercial and residential. The range of power solutions covers 3P, 2P and LI across power needs.

Support

SITE INSPECTION, INSTALLATION SUPERVISION.

Numeric UPS' safe and fault-free operations start at the time of installation. A team of technical experts from Numeric visit the UPS site to perform a comprehensive check of the environment. The site engineer or electrical contractor is informed of their recommendations. The installation is supervised by the Numeric technical team.



SITE TEST, COMMISSIONING.

After the installations, the UPS is subjected to rigorous site tests. The UPS is configured according to user's requirements and completely set-up before going live. After successful testing, the UPS is handed over with the installation report.

Training

TRAINING

On-site training is made available to ensure the safe and efficient operation of the equipment. Hands-on training for the client's engineers and technical team can be arranged at Numeric's plants



Maintenance

PREVENTIVE MAINTENANCE

Optimal performance of the UPS require regular preventive maintenance operations, with parts replaced when needed. Numeric offers Service Contracts with Preventive Maintenance that include cleaning, UPS measurements, functional tests, technical reports (optional), battery health check up and software upgrades.



CORRECTIVE MAINTENANCE, EMERGENCY CALL

Engineers and spare parts stocks have been strategically located to handle emergencies. A powerful diagnostic software helps engineers identify the fault quickly and ensure short MTTR (Mean Time To Repair). The diagnosis further helps corrective actions such as part replacement, adjustments to be performed and return the UPS system back to normal.

Head Office

10th Floor, Prestige Center Court,
Office Block, Vijaya Forum Mall,
183, NSK Salai, Vadapalani,
Chennai - 600 026.
Phone: +91 44 4656 5555

Regional Offices

New Delhi

A 25, 1st Floor, Mohan Co-Operative
Industrial Estate, Mathura Road,
New Delhi - 110 044.
Phone : +91 11 26990028 / 29 / 30

Kolkata

Bhakta Tower, Plot No. KB22,
2nd & 3rd Floor, Salt Lake City,
Sector - III, Kolkata - 700 098.
Phone : +91 33 4021 3535 / 3536

Mumbai

C/203, Corporate Avenue, Atul Projects,
Near Mirador Hotel, Chakala,
Andheri Ghatkopar Link Road,
Andheri (East), Mumbai - 400 099.
Phone : +91 22 3385 6201

Chennai

10th Floor, Prestige Center Court,
Office Block, Vijaya Forum Mall, 183,
N.S.K Salai, Vadapalani, Chennai - 600 026.
Phone : +91 44 3024 7236 / 200

Branch Offices

Chandigarh

SCO 4, First Floor, Sector 16,
Panchkula, Chandigarh - 134 109.
Phone : +91 93160 06215

Dehradun

First Floor, Plot No. 1 & 2,
(679/1) Vijay Park Colony, Main Chakrata Rd,
Dehradun -248 001.
Phone : +91 135 272 9649

Jaipur

Plot No. J-6, Scheme-12B, Sharma Colony,
Bais Godown, Jaipur - 302 019.
Phone : +91 141 221 9082

Lucknow

209/B, 2nd Floor, Cyber Heights,
Vibhuti Khand, Gomti Nagar,
Lucknow - 226 018.
Phone : +91 93352 01364

Bhubaneswar

N-2/72 Ground Floor, IRC Village,
Nayapally, Bhubaneswar - 751 015.
Phone: +91 674 255 0760

Guwahati

House No 02,
Rajgarh Girls High School Road
(Behind Rajgarh Girls High School),
Guwahati - 781 007.
Phone : +91 361 245 0322/245 1987

Patna

204, Fraser Road, Hemplaza,
2nd Floor, Patna - 800 001.
Phone : +91 612 220 0657

Ranchi

202 & 203, Bardwan Compound,
Lalpur, 2nd Floor, Ranchi - 834 001.
Phone : +91 651 221 4071

Ahmedabad

A-101/102, Mondeal Heights,
Beside Hotel Novotel,
Near Iscon Circle, S G Highway,
Ahmedabad - 380 015.
Phone : +91 79 6134 0555

Bhopal

Plot No. 2, 2nd Floor, Office No. 221,
Akansha Building, Zone 1 M. P. Nagar,
Bhopal - 462 011.
Phone : +91 755 276 4202

Nagpur

Plot No.173, Ground Floor,
Utkarsh Ashwini Appts, RPTS Road,
Laxmi Nagar, Nagpur - 440 022.
Phone : +91 712 228 6991 / 228 9668

Pune

302, 3rd Floor, Swastik Chambers,
Above ICICI Bank, Off Karve Road,
Erandwane, Pune - 411 004.
Phone : +91 84 5201 4036

Bengaluru

No-58, First Floor, Firoze White Manor,
Bowring Hospital Road,
Shivajinagar, Bangalore -560 001.
Phone : +91 80 6822 0000

Coimbatore

No. B-15, Thirumalai Towers,
No. 723, 4th Floor, Avinashi Road,
Coimbatore - 641 018.
Phone : +91 422 420 4018

Hyderabad

No. 205-208, 2nd Floor,
Block 2, White House Kundan Bag,
Begumpet, Hyderabad - 500 016.
Phone : +91 40 4567 1732


Kochi

Door No. 50/1107A9,
JB Manjooran Estate, 3rd Floor,
Bypass Junction, Edappally,
Kochi - 682 024.
Phone : +91 484 2801 921

Madurai

Door. No.1,
Pillayar Koil Street, S.S.Colony,
Madurai - 625 016.
Phone : +91 452 260 4555

NUMERIC®

A Group brand | 

Sales - enquiry.numeric@numericups.com
Service - support.numeric@numericups.com
TOLL FREE No.: 1800 425 3266
www.numericups.com